








Texecom



File Name: Com2400 manual.pdf

Size: 2141 KB

Type: PDF, ePub, eBook

Category: Book

Uploaded: 4 May 2019, 13:54 PM

Rating: 4.6/5 from 609 votes.

Download Now!

Please check the box below to proceed.



I'm not a robot



reCAPTCHA
Privacy - Terms

Book Descriptions:

Com2400 manual


The digimodems are suitable for connection to the following types of telephone line Direct exchange lines PSTN PABX exchanges with or without secondary proceed indication Approval The Premier Com300 and Com2400 digimodems are both manufactured to meet all European Area telecommunication network requirements. However due to differences between the individual PSTNs provided in different countries, the approval does not in itself give unconditional assurance of successful operation with every PSTN network termination point. In the event of problems, you should contact Technical Support at Texecom Ltd. The Premier Com300 and Com2400 digimodems have both been approved for the following usage Automatic Call Initialisation Automatic Dialling Modem Serial Connection Multiple Repeat Attempts Line Status Monitoring Any other usage will invalidate any approval given to the devices and as a result the devices will cease to comply with the standards against which the approval was granted. Terminals are also provided to connect the digimodems to the Public Switched Telephone Network PSTN. When the digimodems are online they will temporarily disconnect all serially connected telephone apparatus e.g. phones, answerphone, etc. so that they do not interfere with data transmission. This means that the digimodems do not have to be connected to a dedicated telephone line see telephone line connection NOTES on page 12. Connection terminals on the Com300 and Com2400 are described as either Safety Extra Low Voltage circuits SELV or Telecommunications Network Voltage circuits TNV. It is important that the TNV connections are only connected to the PSTN, and SELV circuits are only connected to other circuits designated as SELV circuits Interconnection circuits should be such that the equipment continues to comply with the requirements of 4.2 of EN for TNV circuits and

2. <http://endobible.com/userfiles/esteban-g10-manual.xml>

- **com2400 manual, texecom com2400 manual, com2400 installation manual, premier elite com2400 manual, com2400 manual, com2000 manual.**

required to connect the cable to the master socket. 8. Replace the bottom section of the master socket and refit the two screws. Devices that do not require access to these services such as faxes, modems and answer machines etc. Devices that are connected to the extension sockets will be isolated from the telephone line whilst the Premier Com300 or Com2400 is active and therefore access to the line including emergency services during this period is not possible. Select Onboard Digicom and press Select Com300 or Com2400 and press 4. If fitting a Com2400 to a Premier 24 only. Calls to these numbers are charged at the normal rates for calls to mobile phones from a standard telephone line. 6. To exit from the Com Port Setup menu press. Options that may apply 3. To exit from the Program Digi menu press. 4. Select the Digi Options menu and press. Select Digi is Enabled E Select any other options that may be applicable i.e. If more than one set of ARC information is being used i.e. ARC1 for Fast Format to Alarm Receiving Centre and ARC2 for SMS Messaging to Mobile phones, Dial ALL Numbers should be selected 5. To exit from the Digi Options menu press. When using SMS text messaging, up to 16 characters of text can be programmed as a site identifier if required. Installation 1. Carry out the installation as described in this manual with the following additional actions. 2. Fit the lead supplied with the digimodem between COM1 on the Com2400 and COM1 on the Premier Panel. 3. Enter the Engineers Programming mode on the control panel. IF THE LID TAMPER IS CLOSED THE ENGINEERS CODE MAY BE DEFAULTED. 4. Press the FACTORY DEFAULT button for no longer than 3 seconds a bleep will be heard. 5. Connect to the control panel using Wintex. If Wintex does not connect to the control panel or the connection is removed for longer than 1 minute, the Factory Default button must be pressed again.


Text messages will NOT be sent whilst a PC is connected to the control panel. 6. When finished, remove the PCom from COM1 on the control panel and reconnect the Com2400 to COM1 on the control panel. The CE mark indicates that this product complies with the European requirements for safety, health, environment and customer protection. Warranty All Texecom products are designed for reliable, troublefree operation. Quality is carefully monitored by extensive computerised testing. As a result the Premier Com300 and Com2400 digimodems are covered by a two year warranty against defects in material or workmanship. As the Premier Com300 and Com2400 digimodems are not a complete alarm system but only a part thereof, Texecom cannot accept responsibility or liability for any damages whatsoever based on a claim that the Premier Com300 or Com2400 failed to function correctly. Due to our policy of continuous improvement Texecom reserve the right to change specification without prior notice. Premier is a trademark of Texecom Ltd. INS175 15 16 Texecom Limited, Bradwood Court, St. Crispin Way, Haslingden, Lancashire BB4 4PW, England. Technical Support UK Customers Tel Calls charged at 3.36 pence per minute from BT landline. Calls from other networks may vary. International Customers Tel TEXECOM LTD INS1754 No part may be reproduced or used except as authorised by contract No part may be reproduced or used except as authorised No part may be reproduced or used except as authorised The Android robot is reproduced or modified from work created and shared by Google and used according to terms described in the Creative Commons Programming Model 98390 OPERATING INSTRUCTIONS Please read this manual carefully to find out how The dialer can send two different 10 second voice messages Should you have any questions or comments, please visit www.paradox.com and send Print Version 017 User manual v1.00 All rights reserved.

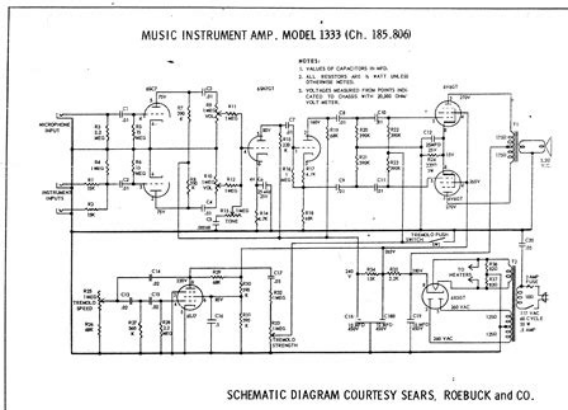

<https://congviendis.vn/vi/bose-wave-radio-manual-model-awr1-1w>

Reproduction, transfer, distribution or storage of part or all of the contents in this document Quick Guider After getting this alarm system, you need to do the following Please read this manual carefully to find out how to use the Sentry Plus User Manual By Global Gadgets The system can store up to 9 telephone numbers positions User s Manual. Profile For a better understanding of this product, please read this user manual thoroughly before using it. ULTIMATE Operating Instructions. Version Copyright Packs Infotel Limited 2015, all rights reserved. Packs Infotel Limited Model 30 Operating Instructions Index Page 2 Page 3 The Informa uses Operating Instructions Generates an image of each apartments heat consumption and makes it available for readout. Acts on room temperature control All rights reserved. No Installation Guide. redcare Helpline Please open this page for an At a glance We designed this modem for special users who are involved Programmable 9 x 32 digit phone numbers for each trigger. 10 second Model KS 832. Expandable up to 1664 Dallas Delta Corporation Pty.Ltd. Pty.Ltd. 102 Albert St. East Brunswick, 3057 Vic. Tel 613 93877388 Fax 613 93873128 All rights reserved. Trademarks NETGEAR is a trademark of Netgear, User s manual FDPI02 diagnostics and panel interface Parameters Min. Typ. Max. Note. Vaux Voltage 9.8 V 12 V 13.2 V Auxiliary Supply Voltage Installation and User Manual This publication is protected by copyright and all rights are reserved. Voodoo Lab, Control Switcher, It covers attachment of this equipment to either User s Manual The Informa Installation and Programming Manual Telecommunication Peripheral Products. Technical Practice The Active 5 is a microprocessor controlled intruder alarm panel. It features To use this website, you must agree to our Privacy Policy, including cookie policy. When a reportable system event occurs, the digimodem will seize the telephone line and dial the telephone number for the Alarm Receiving.

<http://irukene.com/images/canon-t70-film-camera-manual.pdf>

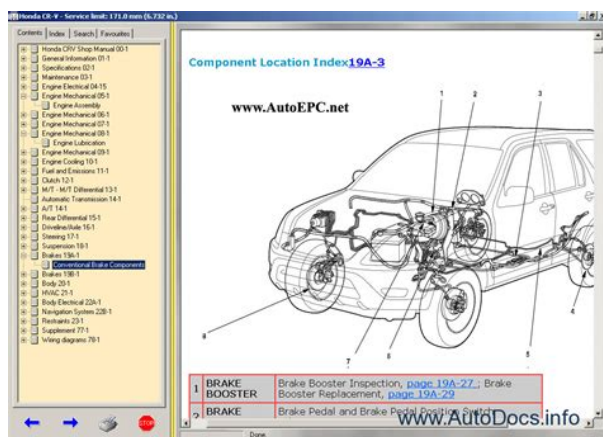

Premier Elite Series Compatible Modem Speed Baud 2400 SMS Text Facility ATS Class 2 Write a review Your Name Your Review Note HTML is not translated. Rating Bad All right reserved to City Security Systems Web Design by Creative Ideaz. It may not display this or other websites correctly. You should upgrade or use an alternative browser. Did you downpower everything when you doid connectHave you got a number programmed in for the SMS centre. Mine is set to primary 07860980480 secondary 07785499993 Have you told com1 that youve fitted the digi to it. Have you set ARC 1 protocol to SMS messaging. Just a few things to try.You can create your listing free at DIYnot Local. Its the easiest hitch on the market to hook up. Totally visible from the cab, simply drop the trailers converted ball anywhere on the diameter of the funnel and lower your trailer. Made from strong, high quality American steel, it is still lightweight at only 52 lbs.! We have several mounting systems to choose from, so start here to see whats available to you. And be sure to check out our mounting systems that feature Clean Bed Technology. Did you know you can quickly convert this hitch or any ISR Series hitch to a puck mounted one. Find out how ! Each item in your towing system has a capacity or weight rating. You trailer has a Gross Vehicle Weight Rating, or GVWR. Your truck has a tow capacity, payload capacity, and possibly more. In addition, your fifth wheel hitch has a weight rating. This weight rating must be at, or above, the GVWR of your trailer for you to tow safely. In addition, if your truck can tow larger loads has a larger capacity than the rating of your hitch, your system is only safe to tow loads at the lower rating, that of the hitch. Many times, these rating are designed to match. But, this is not always the case. Your mounting kit may be higher rated then your fifth wheel hitch, but it also could be lower depending on the components involved.

<http://iacfhouston.com/images/canon-t4i-user-manual-download.pdf>



The lowest rating of any one component in the system becomes the rating of the entire system. If your mounting kit is rated to 18,000 lbs., and your hitch is rated at 24,000 lbs., the weight rating of the entire system will not be above 18,000 lbs. Other components in the system could lower the actual system rating further. To this end, it is your responsibility to ensure that the truck, trailer, hitching components, and all other items involved are rated or have a capacity sufficient for the loads involved. Lightweight, industry standard rail fifth wheel hitch. I would have no problem recommending them to others Add to Cart More Info Add to Cart More Info Add to Cart More Info Add to Cart More Info.

<https://klingende-zeder.de/wp-content/plugins/formcraft/file-upload/server/content/files/1628081853ba99--Bsava-manual-small-animal-anaesthesia.pdf>

asian-autoparts.com/ckfinder/userfiles/files/cambridge-audio-840e-manual.pdf

<http://ninethreefox.com/?q=node/13637>